

## COMPACT 10/12 RTE



- Adapted for rough terrain conditions or inside use
- 2 wheel drive
- 3.7 x 1.54m (12ft 2in x 5ft 1in) with extension deck extended
- Maximum load capacity of 565kg (1 245lb)

ISO 9001  
GROUP  
PINGUELY  
HAULOTTE



ARTICULATED BOOMS



VERTICAL MASTS



TELESCOPIC BOOMS



SCISSOR LIFTS



TRAILERS

**Haulotte**®

ON THE UP

# COMPACT 10/12 RTE

# Electric scissor lifts

## The Haulotte® advantages

- Fully proportional controls
- Electric scissor lift with a 9,84 in (25cm) ground clearance allowing exceptional all-terrain performance
- Tight turning radius provides for excellent manoeuvrability in confined spaces
- Increased workspace area
- Robust, reliable and easy to maintain
- Improved safety due to inclusion of load limiter at the platform

## STANDARD FEATURES



- 2 rear drive wheels and 2 front steer wheels
- 3° tilt alarm
- 2 drive speeds
- One 1.2m (47in) manual slide out extension deck
- Load limiter at the platform with alarm
- Removable control box
- Free wheeling device
- Hourmeter
- Horn
- Side protections
- Towing hooks and lifting eyes
- Safety hooks for harness
- 4 hydraulic brakes
- Emergency lowering system
- Foam filled rough terrain tyres
- Proportional drive control

## OPTIONS & ACCESSORIES

- Flashing light
- Work light
- Motion alarm
- Mains electric power outlet at platform
- Biodegradable oil for warm or cold temperature
- Hot countries kit
- Cold countries kit
- Non-marking tyres
- Collapsible handrails
- On-board generator 800W
- Traction batteries



D I S T R I B U T E D B Y

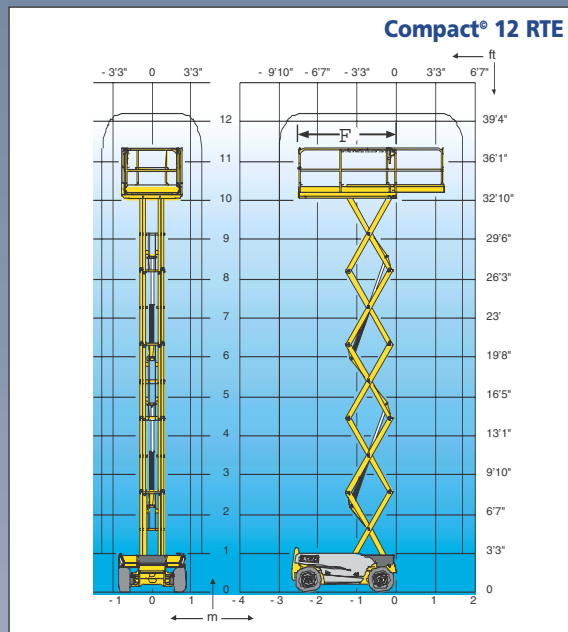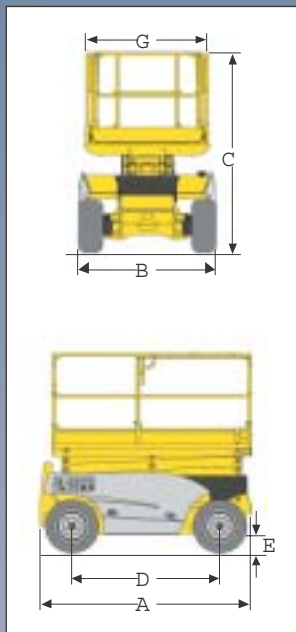

## SPECIFICATIONS

	Compact 10 RTE		Compact 12 RTE	
Working height	10,2 m	39ft 5in	12,14 m	39ft 10in
Platform height	8,2 m	26ft 10in	10,14 m	33ft 3in
Maximum capacity	565 kg	1245lb	450 kg	992lb
A Length	2,65 m	8ft 8in	2,65 m	8ft 8in
B Width	1,80 m	5ft11in	1,80 m	5ft11in
C Height (guardrails)	2,37 m	7ft 10in	2,54 m	8ft 4in
Height (plat-form)	1,3 m	4ft 3in	1,4 m	4ft 7in
D Wheelbase	1,87 m	6ft 2in	1,87 m	6ft 2in
E Ground clearance	25 cm	9,84in	25 cm	9,84in
FXG Platform size	2,5 x 1,54 m	8ft2in x 5ft 1in	2,5 x 1,54 m	8ft2in x 5ft 1in
Platform extension	1,2 m	47in	1,2 m	47in
Capacity on extension	150 kg	331lb	150 kg	331lb
Drive speed	1 à 5,8 km/h	0.62 / 3.6 mph	1 à 5,8 km/h	0.62 / 3.6 mph
Outside turning radius	3,78 m	12ft 5in	3,78 m	12ft 5in
Raise / lower speed (sec.)	35 / 35			
Engine	11,5kw / 48v			
Maximum gradeability	25 %			
Brakes	Hydraulic			
Foam filled tyres	26 x 12 - 12			
Hydraulic tank	45 l			
Semi-traction batteries	48V - 8x6V - 285AH			
Charger	45 A			
Weight	3380 kg	7 452lb	3720 kg	8201lb

